


LD-AW14203T2L
Fully automatic 3-spindle winding and double tapping machine

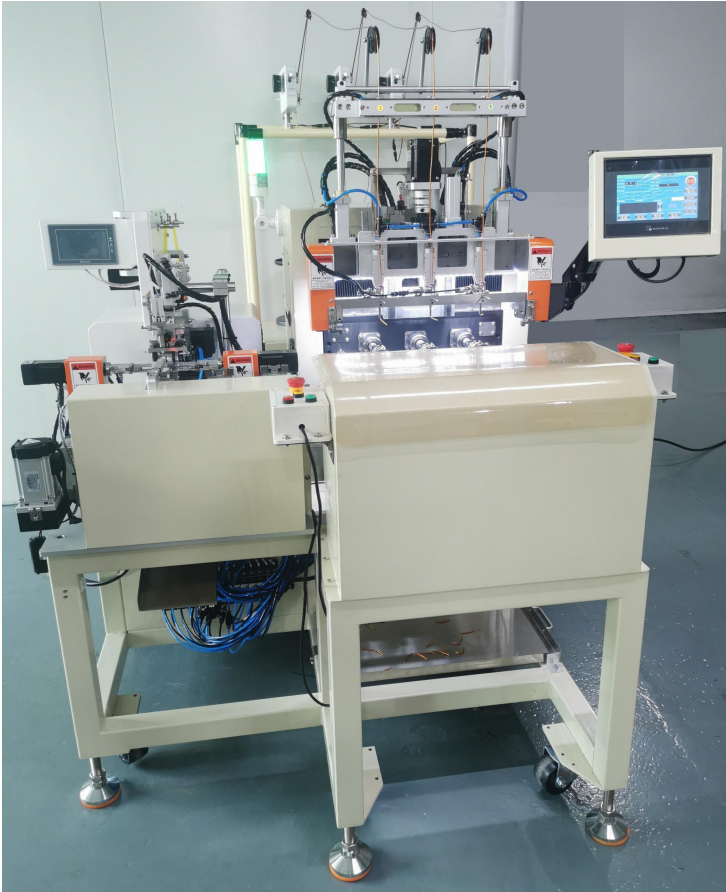

| | |
|--|---|
| Spindle number: | 3 |
| Spindle pitch: | 142 |
| Spindle direction: | Clockwise/Counterclockwise per circle/360 degrees |
| Spindle speed(S1): | 6000rpm |
| Pneumatic scissors wire diameter range: | 0.4~1.2mm |
| 3D route: | X: 180 Y: 120 Z: 100 mm |
| Spindle servo motor power (S1): | 1000W |
| Front and back displacement of wire wrap tape (B): | Servo motor 200W |
| Needle bar movement configuration servo motor power: | X : 400 Y : 400 Z : 400 W |
| Secondary axis rotation axis servo motor (S2): | Servo motor 400W |
| The front and back displacement of the secondary axis(Y2): | Servo motor 400W |
| Moving speed: | 70mm/sec |
| Power Supply: | AC 220V±10% 50HZ |
| Power Consumption: | 3600W |
| Required Air Pressure: | 4~6kgf/cm ² |
| Dimensions : | L1280 x W1280 x H1550mm |
| Net Weight: | 480Kgs |