


LD-TDW16004A
Fully Automatic 4-Spindle Toroidal Differential Mode Inductor Winding Machine

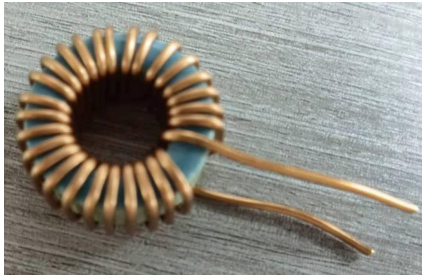

Synchronous work	4 groups
Motion control system axis number	10/12 axis
Wheelbase	160mm
Applicable magnetic ring outer diameter	16~58mm
The smallest magnetic ring completes the inner diameter	8mm(the finished inner diameter is not less than the hook needle)
Applicable wire diameter range	0.5~2.0mm
Maximum hook wire length	1.5M
Rated power	3500W
Power consumption	600W
Power supply	AC 220±10V 50/60 Hz
Air source	0.4~0.7MPa
Dimensions	1900(L)X1200(W)X1950(H)mm
Net Weight	600kgs